

GX-80452

CRYSTAL

SMD



TYPICAL APPLICATIONS

Bluetooth, Wireless LAN, Audio Equipment, PCMCIA, PCs, Hand-held Electronic Products, Disc Drive, PC, PC Accessory Card, NoteBook, A/V Cards

FEATURES

Miniature and Thin, Ceramic SMD Package, Glass Sealed, Tight Tolerance and Stability, Reflow Soldering, Emboss Taping, RoHS Compliant Standard

DIMENSIONS

8.0x4.5x1.4[mm]

TYPICAL SPECIFICATIONS

Model	GX-80452	
Nominal Frequency Range	7.000~50.000MHz	30.000~70.000MHz
Standard Frequency	7.000, 10.000, 16.000MHz	30.000, 48.000MHz
Vibration Mode	Fundamental [AT]	3rd Overtone [AT]
Frequency Tolerance (@ +25°C)	±30 ppm, ±50 ppm	
Freq. Temp. Characteristics (Ref. to 25°C)	±30 ppm, ±50 ppm (-10°C~+70°C)	
	±50 ppm, ±100 ppm (-40°C~+85°C)	
Operating Temperature Range	-10°C~+70°C, -40°C~+85°C	
Storage Temperature Range	-40°C~+90°C	
Load Capacitance	Series, 10pF, 12pF, 16pF, 18pF, 20pF	
Shunt Capacitance	5pF Max.	
Drive Level	10µW (100µW Max.)	
Equivalent Series Resistance	See Table 1	
Aging (+25°C)	±5 ppm / year Max.	

Please consult with our sales department for other parameters.

* Package quantity 1,000 pcs max./reel.

OUTLINE DIMENSIONS
Unit:mm

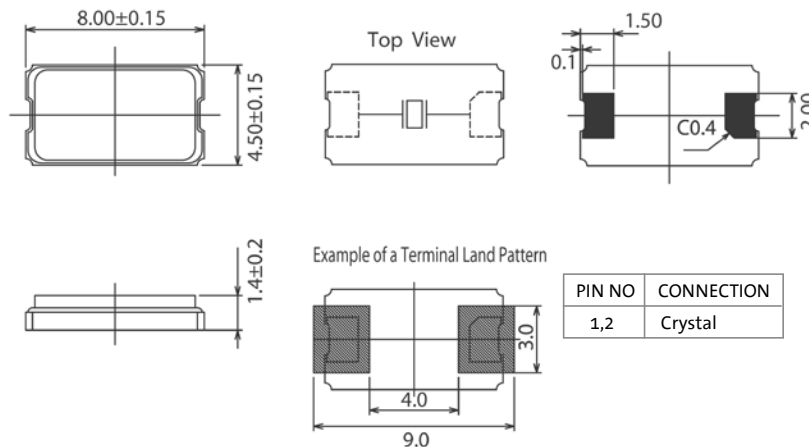


TABLE 1: ESR

AT-cut Fundamental		AT-cut 3rd Overtone	
Frequency (MHz)	ESR (Ω)	Frequency (MHz)	ESR (Ω)
7.000~9.999	80	30.000~44.999	80
10.000~15.999	60	50.000~59.999	70
16.000~50.000	50	60.000~70.000	60

All specifications are subject to change without notice.